
MVSE-600 series

SOLENOID **VALVE**

Mindman

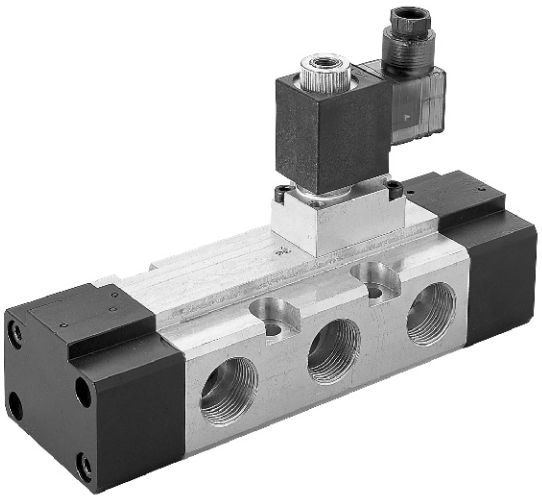

Specification:


Model	MVSE-600-4E1	MVSE-600-4E2
Bore No.	20A , 25A	
Port size	PT 3/4 , PT 1	
No. of port	5	
No. of position	2	
Medium	Air	
Operating pressure range	2~7 kgf/cm^2	
Proof pressure	10 kgf/cm^2	
Effective orifice	20A: 96 mm^2	
	25A: 100 mm^2	
Response time	80 ms	
Ambient temperature	−5~+50℃ (No freezing)	
Voltage	AC110V, AC220V (50/60)Hz, DC24V	
Power consumption	AC=13/11VA, DC=10W	
Available voltage range	±10%	
Insulation class	H class	
Weight	1817 g	2102 g

Order example of valve:

MVSE − 600 − 4E2 − 25A − AC110 − L − BSP

- MVSE — MODEL
- 600 — BODY WIDTH
- 4E2 — **4**: 4way; **E1**: Single Solenoid; **E2**: Double Solenoid
- 25A — BORE SIZE: **20A**: PT 3/4; **25A**: PT 1
- AC110 — VOLTAGE: **AC220**V(50/60)Hz; **AC110**V(50/60)Hz; **DC24**V
- L — Blank: DIN connector; **L**: LED indicator
- BSP — PORT THREAD: Blank: PT thread; **BSP**: BSP thread; **NPT**: NPT thread

Flow features:

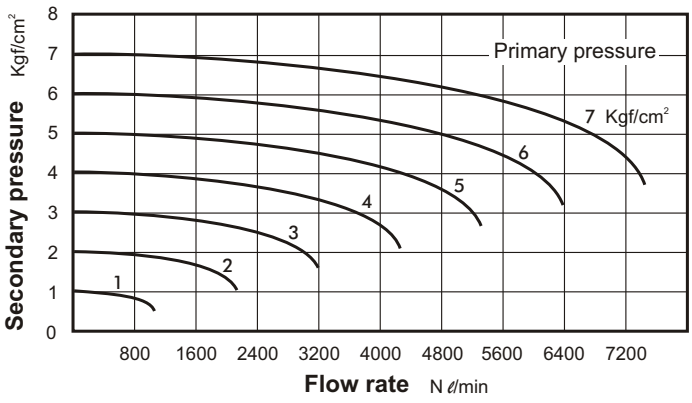


MVSE-600


SOLENOID **VALVE**

Mindman

Dimensions:

MVSE-600-4E1



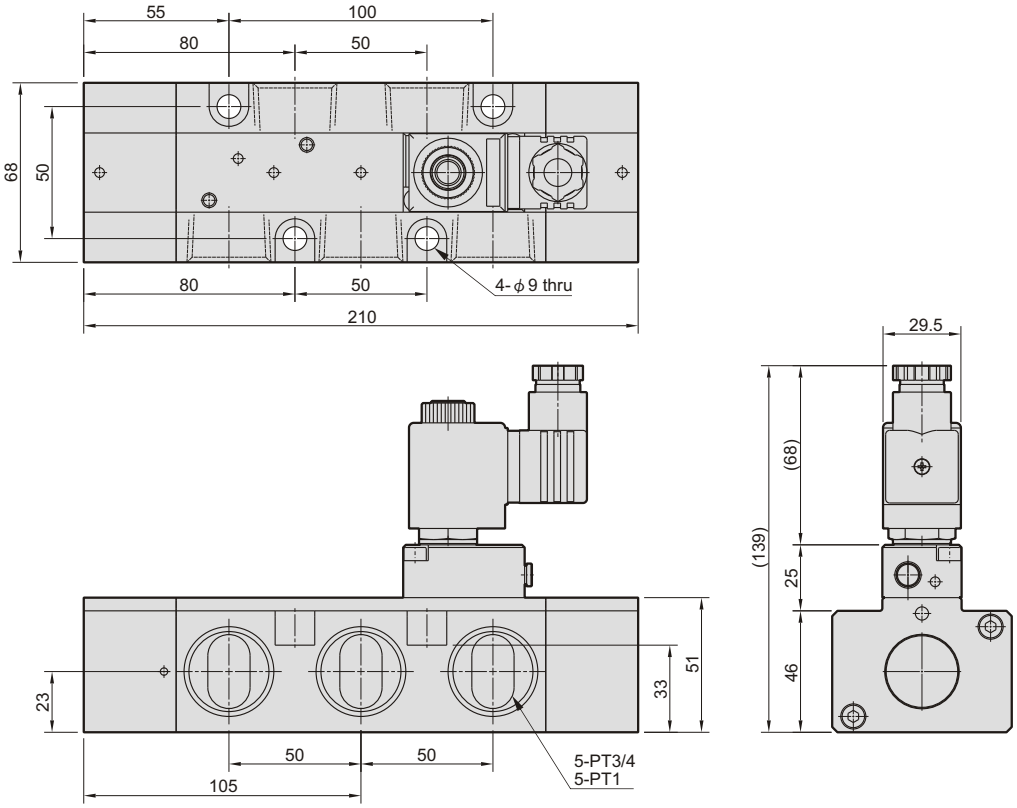

MVSE-600-4E2

